





WAY TO GO LED High Bay Light



Drawing of Shade



45 degree D420 x H255




90 degree D500 x H195



120 degree D500 x H140

Material: Aluminum or
Transparent Acrylic




WTG High Bay LED

Power	80, 100, 120, 150, 200, 300W
Frequency Range	50 / 60Hz
Voltage	100 - 277V OR 347 - 480V
Inrush Current	4A@220V Input; Cold start
LED Type	Cree XML T6
Power Supply	Mean Well
Power Factor	0.95
LED Luminous Efficiency	100 Lm/W
Color Temperature	5,000 - 7,000K
Color Rendering Index	Ra > 75
Beam Angle	45° / 90° / 120°
Working Temperature	-20°C ~ +55°C
Working Life-span 70%	50,000H
Warranty	5 years


DLC & UL Listed Model	WTG-HBL150W347-480
	WTG-HBL150W277
	WTG-HBL200W277
	WTG-HBL200W347-480
UL Listed Model	WTG-HBL80W277
	WTG-HBL100W347-480
	WTG-HBL120W277
	WTG-HBL300W277

Photos & Drawings

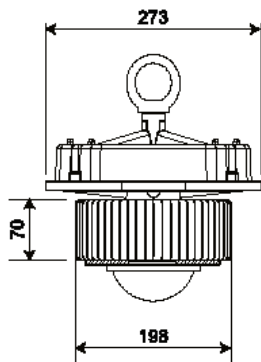


80W

Lumens: 7,200lm
Weight: 5.6 kg

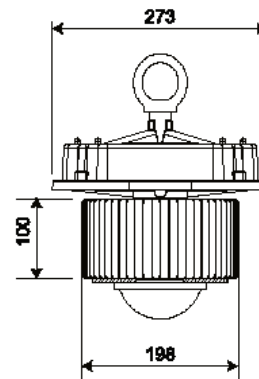


100W

Lumens: 9,600lm
Weight: 6.5 kg

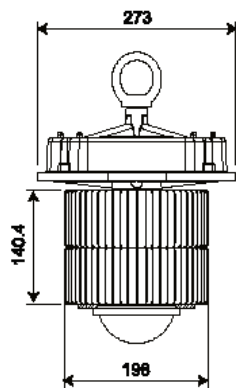


120W

Lumens: 11,000lm
Weight: 6.9 kg

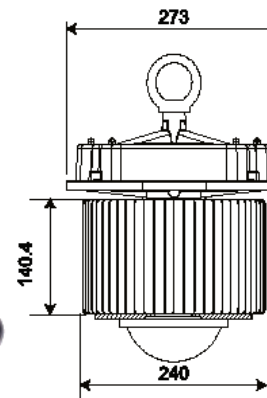


150W

Lumens: 13,600lm
Weight: 7.3 kg

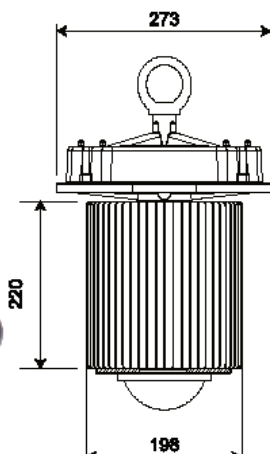

200W

Lumens: 17,000lm
Weight: 8.9 kg

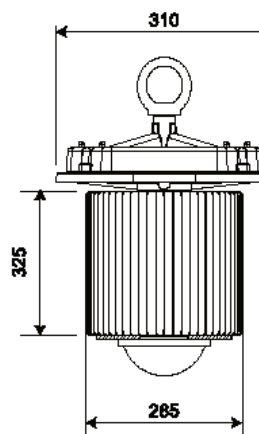

300W

Lumens: 24,000lm
Weight: 13.6 kg



LM79
LM80

